




CARACTERISTICAS


Carcasa: Aluminio
 Conductividad térmica: 96 W/m·K
 Led: Philips Certaflux cob 1208
 Cri: Ra>90
 SDCM:<6
 Power Factor: 0,95
 THD: <10
 Driver: Philips
 Eficiencia Driver: 90%
 Color : Blanco(RAL9016)/Negro)RAL(9005)
 UGR: <19 / <16
 Estanqueidad: IP40
 Test de impacto: IK08
 Corriente: 200-240V/120-270V
 Temperatura Optima: -25~40°C
 TM21: LM80B10>50.000H

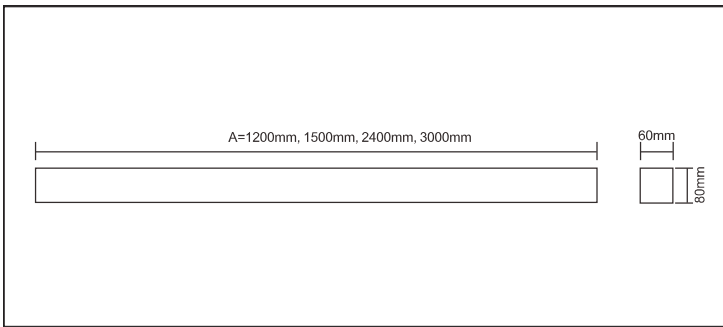

FUNCIONES

On / Off · DALI · 1-10V · TRIAC · CASAMBI

DISTRIBUCIONES OPTICAS



150 LM/W

5 YEARS WARRANTY

Philips Driver

Philips LED

Modelo	Potencia	Voltage	Lumenes	IP	Dimensiones
DTC4521X0	21 W	200~240v	3200Lm	IP44	L1200*W60H80
DTC4532X0	32 W	200~240v	1900/ 2900 Lm	IP44	L1200*W60H80
DTC4527X0	27 W	200~240v	4000Lm	IP44	L1500*W60H80
DTC4540X0	40 W	200~240v	2400/ 3600Lm	IP44	L1500*W60H80
DTC4553X0	53 W	200~240v	8000Lm	IP44	L3000*W60H80
DTC4580X0	80 W	200~240v	4800/ 7200Lm	IP44	L3000*W60H80